

PMR10H Series



10W, Encapsulated, AC/DC Converters

Features

- ▶ Rated power: 10W Max
- ▶ Universal input: 85~305VAC, 47~63Hz
- ▶ Regulated single output
- ▶ Isolation voltage 4000VAC
- ▶ Typical efficiency 78 ... 85%
- ▶ Energy saving, standby power only 0.1W
- ▶ Operating temperature range: -40~+85°C
- ▶ RoHS compliance
- ▶ No external components required for operating
- ▶ Over voltage, over current and short circuit protection
- ▶ Certified to UL/EN/IEC 62368-1, OVC II, EN60335-1, EN61558-1, FCC, UKCA, CISPR32, EN55032 Class B with NO externals
- ▶ 5 year warranty



RoHS CE cUL us UK CA CB

Overview

PMR10H series are compact size AC/DC power converters, featuring universal input voltage range, low stand by power consumption, high efficiency. Designed for high reliability industrial applications, these converters are encapsulated to protect from dust and moisture. They are certified to UL/EN/IEC 62368-1, OVC II, EN60335-1, EN61558-1, FCC, UKCA and EMC performance meets CISPR32, EN55032 Class B without support from any external components, ideally suitable for industrial, and critical commercial applications.

Model Numbers

Model Number	Input Voltage [VAC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [uF] Max.
PMR10H-033	85~305VAC 100~430VDC	3.3	2500	78	6600
PMR10H-050		5	2000	82	5000
PMR10H-090		9	1111	84	3000
PMR10H-120		12	833	85	2000
PMR10H-150		15	666	85	1500
PMR10H-240		24	416	85	680

* Only typical models are listed, other models may be available, upon request.

PMR10H Series

10W, Encapsulated, AC/DC Converters

Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Input voltage range	AC in	85	-	305	VAC
	DC in	100	-	430	VDC
Input frequency		47	-	63	Hz
Nominal input voltage		100	-	277	VAC
Input current	115VAC 230VAC	-	-	0.18 0.12	A
Inrush current Cold start	115VAC 230VAC	-	35 70	-	A
Leakage current	277VAC, 50Hz	-	0.25	0.6	mA RMS
Output voltage accuracy		-	± 3	-	%
Line regulation	Full load	-	± 0.5	-	%
Load regulation	$I_{OUT}=0\%\sim 100\%$ of $I_{OUT, rated}$	-	± 1.0	-	%
Ripple and noise [2]	20MHz bandwidth	-	150	200	mVp-p
Temperature coefficient		-	± 0.02	-	%/ $^{\circ}\text{C}$
Standby power consumption		-	0.1	-	W
Hold up time Full load	115VAC 230VAC	-	10 50	-	mS
Over voltage protection Hiccup or clamping by zener diode	$V_{OUT}=3.3, 5\text{V}$ $V_{OUT}=9, 12\text{V}$ $V_{OUT}=15\text{V}$ $V_{OUT}=24\text{V}$	-	-	8.5 20 24 34	VDC
Over current protection	Automatic recovery	110	-	-	% I_{OUT}
Short circuit protection		Hiccup mode, automatic recovery			
Minimum load		No minimum load is required			
Built in fuse		2A, 300V, slow blow			

Note [2]: Ripple and noise measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.

PMR10H Series

10W, Encapsulated, AC/DC Converters

General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage Tested for 1 minute	I/P to O/P	4000	-	-	VAC
Isolation resistance 500VDC, 25°C, 70%RH	I/P to O/P	100	-	-	M Ohm
Switching frequency		-	65	-	KHz
Operating temperature range	See "Derating Curve"	-40	-	85	°C
Storage temperature		-40	-	105	°C
Storage humidity		10	-	95	%RH
Maximum case temperature		-	-	95	°C
Operating altitude	See "Derating Curve"	-	-	5000	m
Soldering temperature	5 seconds	-	260	-	°C
Case material		Black plastic UL94-V0			
Cooling method		Free air convection			
Vibration		10Hz to 55Hz, 5G, 30 minutes along X, Y and Z axis			
MTBF	MIL-HDBK-217F	> 1,500,000 Hours, 25°C			
Overvoltage category		OVC II			
Safety class		Class II			
Safety approvals		UL/EN/IEC 62368-1, UKCA, EN 60335-1, EN 61558-1			
EMC standards	CISPR32, EN55032	Class B with "NO External Circuit"			
ESD	IEC/EN61000-4-2	Contact ±6kV, Air ±8kV, perf. Criteria B			
Radiated	IEC/EN61000-4-3	10V/m, perf. Criteria A			
EFT, Burst	IEC/EN61000-4-4	±2kV, perf. Criteria B ±4kV, perf. Criteria B [3]			
Surge	IEC/EN61000-4-5	Line to Line ±1kV, perf. Criteria B Line to Line ±2kV, perf. Criteria B [3]			
Conducted	IEC/EN61000-4-6	10Vrms, perf. Criteria A			
Voltage dips and interruptions	IEC/EN 61000-4-11	0%, 70%, perf. Criteria B			
Size, and Weight		45.7x25.4x21.5mm, 33g			
Packing info	300 PCS/Carton	427x325x250mm, 11.4Kg G.W.			

Note [\[3\]](#): with External Circuit Figure 1 for EMC Enhancement

Recommended External Circuits

EMC Enhancement Circuit

*This external circuit is not required for general purpose, but for EMC enhancement where higher EFT and Surge rating is needed.

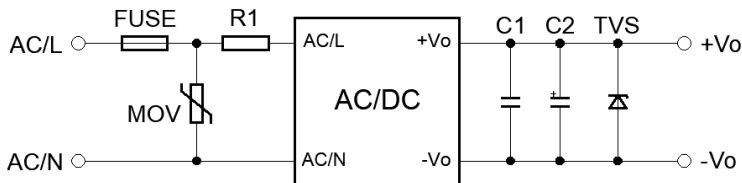


Figure 1. EMC Enhancement Circuit

Recommended Components [Table 1]


V _{OUT}	FUSE	MOV	R1	C1	C2	TVS
3.3, 5V	3.15A, 300V	S14K350	6.8 Ohm, 3W	1uF, 50V	220uF, 35V	SMBJ7.0A
9V	3.15A, 300V	S14K350	6.8 Ohm, 3W	1uF, 50V	100uF, 35V	SMBJ12A
12, 15V	3.15A, 300V	S14K350	6.8 Ohm, 3W	1uF, 50V	100uF, 35V	SMBJ20A
24V	3.15A, 300V	S14K350	6.8 Ohm, 3W	1uF, 50V	100uF, 35V	SMBJ30A

* For further questions contact one of our sales representatives.

Characteristic Curves


Output vs Ambient Temperature

V_{OUT} = 3.3V, 5V

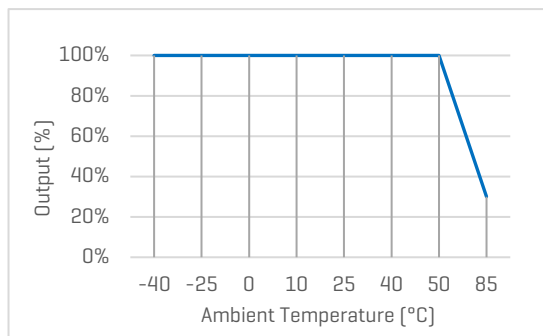


Output vs Ambient Temperature


V_{OUT} = 9 ... 24V

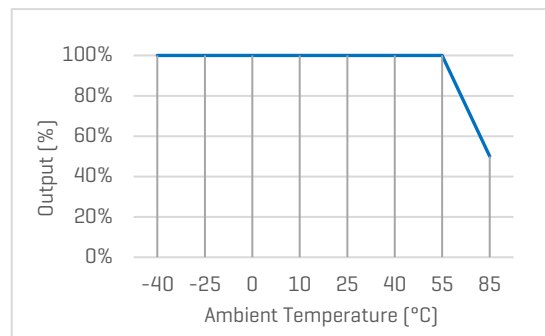

Output vs Input Voltage

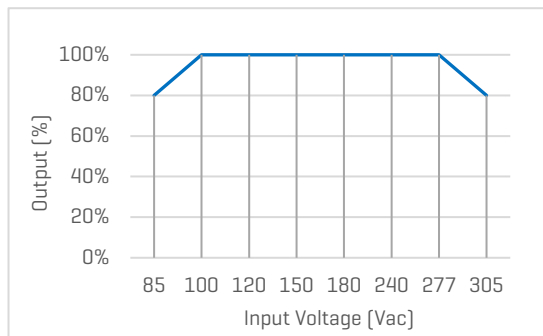


Output vs Altitude

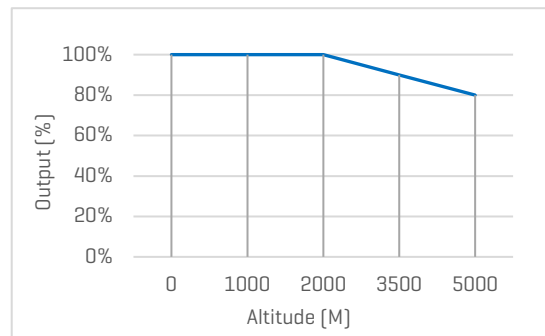

Mechanical Specifications

Default Package

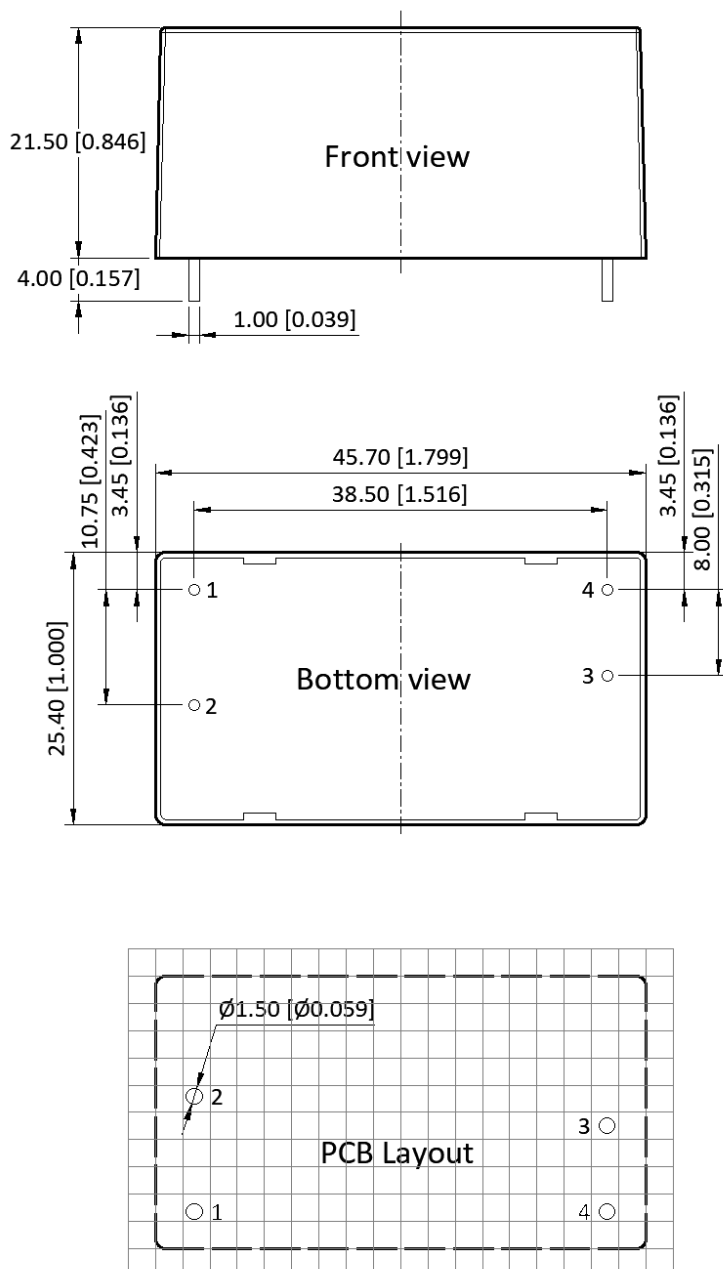

Pin Definition

Pin #	Single Out
1	AC [L]
2	AC [N]
3	+V _{OUT}
4	-V _{OUT}

* Unless otherwise specified unit: mm [inch]

* General tolerance: $\pm 1.00 [\pm 0.040]$

* Pin thickness: $\pm 0.15 [\pm 0.006]$

* Pin distance: $\pm 0.50 [\pm 0.020]$

* Footprint grid 2.54 x 2.54 mm