


PMR30H Series

WinkEE

30W, Encapsulated, AC/DC Converters

Features

- ▶ Rated power: 30W Max
- ▶ Universal input: 85~305VAC, 47~63Hz
- ▶ Regulated single output
- ▶ Isolation voltage 4200VAC
- ▶ Typical efficiency 85 ... 90%
- ▶ Energy saving, standby power only less than 0.1W
- ▶ Operating temperature range: -40~+85°C
- ▶ RoHS compliance
- ▶ No external components required for operating
- ▶ Over voltage, over current and short circuit protection
- ▶ Certified to UL/EN/IEC 62368-1, OVC III, EN60335-1, EN61558-1, FCC, UKCA, CISPR32, EN55032 Class B with NO externals
- ▶ 5 year warranty



RoHS CE cUL us UK CA CB

Overview

PMR30H series are compact size AC/DC power converters, featuring universal input voltage range, low stand by power consumption, high efficiency. Designed for high reliability industrial applications, these converters are encapsulated to protect from dust and moisture. They are certified to UL/EN/IEC 62368-1, OVC III, EN60335-1, EN61558-1, FCC, UKCA and EMC performance meets CISPR32, EN55032 Class B without support from any external components, ideally suitable for industrial, and critical commercial applications.

Model Numbers

Model Number	Input Voltage [VAC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [uF] Max.
PMR30H-033	85~305VAC 100~430VDC	3.3	6000	85	6600
PMR30H-050		5	6000	86	6600
PMR30H-090		9	3400	88	4400
PMR30H-120		12	2500	90	4400
PMR30H-150		15	2000	90	3300
PMR30H-240		24	1300	88	1000
PMR30H-480		48	625	90	470

Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Input voltage range	AC in	85	-	305	VAC
	DC in	100	-	430	VDC
Input frequency		47	-	63	Hz
Nominal input voltage		100	-	277	VAC
Input current	115VAC 230VAC	-	-	0.75 0.50	A
Inrush current Cold start	115VAC 230VAC	-	20 50	-	A
Leakage current	277VAC, 50Hz	-	-	0.1	mA RMS
Output voltage accuracy	$V_{OUT}=3.3\text{V}$ others	-	± 3 ± 2	-	%
Line regulation	Full load	-	± 0.5	-	%
Load regulation	$V_{OUT}=3.3\text{V}$ $V_{OUT}=5\text{V}$ others	-	± 2.0 ± 1.5 ± 1.0	-	%
Ripple and noise [2] 20MHz bandwidth	$V_{OUT}=24, 48\text{V}$ others	-	-	150 100	mV
Temperature coefficient		-	± 0.02	-	%/ $^{\circ}\text{C}$
Standby power consumption	$V_{OUT}=24, 48.0\text{V}$ Others	-	0.15 0.10	0.2 0.12	W
Hold up time Full load	115VAC 230VAC	-	10 50	-	mS
Over voltage protection Hiccup or clamping by zener diode	$V_{OUT}=3.3\text{V}$ $V_{OUT}=5, 9, 12\text{V}$ $V_{OUT}=15\text{V}$ $V_{OUT}=24\text{V}$ $V_{OUT}=48\text{V}$	-	-	6.3 16 25 35 60	VDC
Over current protection	Automatic recovery	110	-	-	% I_{OUT}
Short circuit protection		Hiccup mode, automatic recovery			
Minimum load		No minimum load is required			
Built in fuse		2A, 300V, slow blow			

Note [2]: Ripple and noise measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.

PMR30H Series

WinkEE

30W, Encapsulated, AC/DC Converters

General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage Tested for 1 minute	I/P to O/P	4200	-	-	VAC
Isolation resistance 500VDC, 25°C, 70%RH	I/P to O/P	100	-	-	M Ohm
Switching frequency		-	65	-	KHz
Operating temperature range	See "Derating Curve"	-40	-	85	°C
Storage temperature		-40	-	105	°C
Storage humidity		10	-	95	%RH
Maximum case temperature		-	-	95	°C
Operating altitude	See "Derating Curve"	-	-	5000	m
Soldering temperature	5 seconds	-	260	-	°C
Case material		Black plastic UL94-V0			
Cooling method		Free air convection			
Vibration		10Hz to 55Hz, 5G, 30 minutes along X, Y and Z axis			
MTBF	MIL-HDBK-217F	> 1,500,000 Hours, 25°C			
Overvoltage category		OVC III			
Safety class		Class II			
Safety approvals		UL/EN/IEC 62368-1, UKCA, EN 60335-1, EN 61558-1			
EMC standards	CISPR32, EN55032	Class B with "NO External Circuit"			
ESD	IEC/EN61000-4-2	Contact ±6kV, Air ±8kV, perf. Criteria B			
Radiated	IEC/EN61000-4-3	10V/m, perf. Criteria A			
EFT, Burst	IEC/EN61000-4-4	±2kV, perf. Criteria B ±4kV, perf. Criteria B ^[3]			
Surge	IEC/EN61000-4-5	Line to Line ±2kV, perf. Criteria B and Line to ground ±4kV, perf. Criteria B ^[3]			
Conducted	IEC/EN61000-4-6	10Vrms, perf. Criteria A			
Voltage dips and interruptions	IEC/EN 61000-4-11	0%, 70%, perf. Criteria B			
Size, and Weight		69.5x39.0x24mm, 100g Typ.			
Packing info	144 PCS/Carton	Size: 372x345x260mm, G.W. 15.8Kg Typ.			

Note ^[3]: with External Circuit Figure 1 or Figure 2 for EMC Enhancement

Recommended External Circuits

EMC Enhancement Circuit 1

*This external circuit is not required for general purpose, but for EMC enhancement where higher EFT and Surge rating is needed.

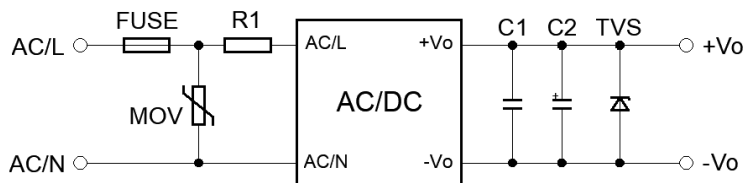


Figure 1. EMC Enhancement Circuit 1

[Table 1] Recommended Components

V _{OUT}	FUSE	MOV	R1	C1	C2	TVS
3.3, 5V	3.15A, 300V	S14K350	3 0hm, 3W	1uF, 50V	10uF, 50V	SMBJ7.0A
9V	3.15A, 300V	S14K350	3 0hm, 3W	1uF, 50V	10uF, 50V	SMBJ12A
12, 15V	3.15A, 300V	S14K350	3 0hm, 3W	1uF, 50V	10uF, 50V	SMBJ20A
24V	3.15A, 300V	S14K350	3 0hm, 3W	1uF, 50V	10uF, 50V	SMBJ30A
48V	3.15A, 300V	S14K350	3 0hm, 3W	1uF, 100V	10uF, 63V	SMBJ64A

* For further questions contact one of our sales representatives.

EMC Enhancement Circuit 2

*This external circuit is not required for general purpose, but for EMC enhancement where higher EFT and Surge rating is needed.

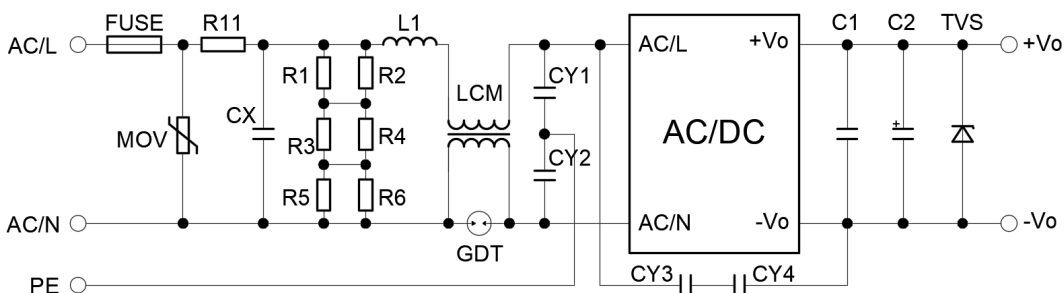


Figure 2. EMC Enhancement Circuit 2

[Table 2] Recommended Components

MOV	CX	R11	L1	LCM	GDT	CY1, CY2	CY3, CY4
S14K350	0.33uF, 305VAC	6.5 0hm, 5W	1.2mH, 0.5A	20mH	300V, 1KA	2.2nF, 400VAC	1nF, 400VAC


R11 is wire-wound resistor, FUSE* is required, R1 ... R6 [1.5Mohm, 1206] is the bleeder resistance of CX. Other components see the same in Table 1

Characteristic Curves


Derating Curves

Output vs Ambient Temperature


$V_{OUT}=5V$

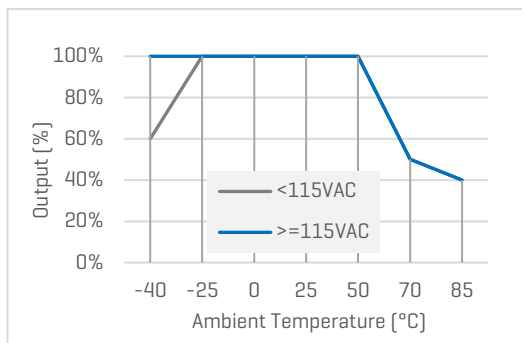


$V_{OUT}=others$

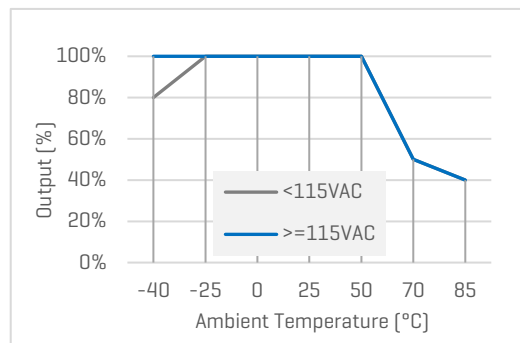

Output vs Input Voltage

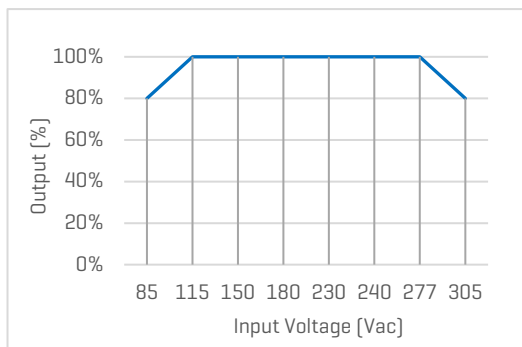


Output vs Altitude

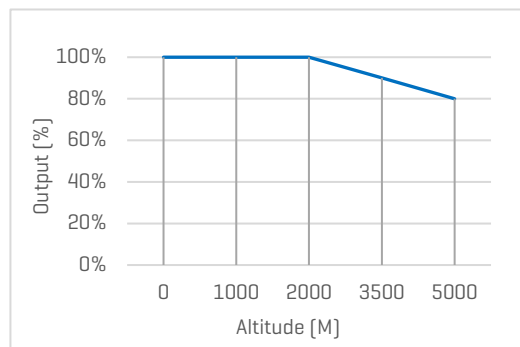


Efficiency Curves

Efficiency vs Input Voltage

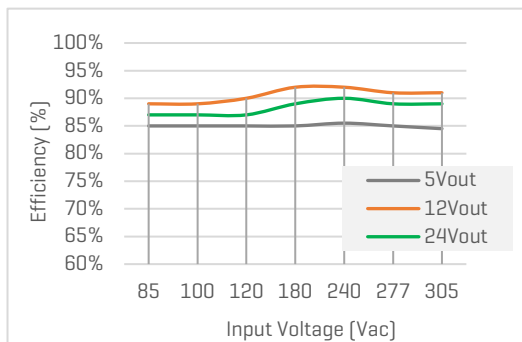


Efficiency vs Load

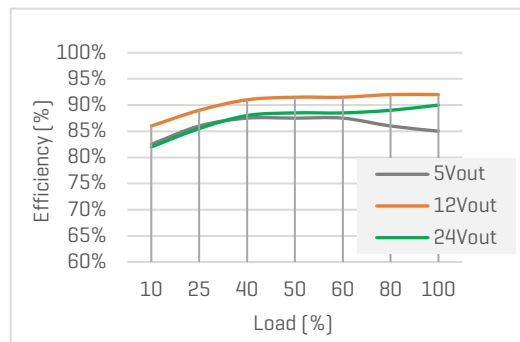

Mechanical Specifications

Default Package

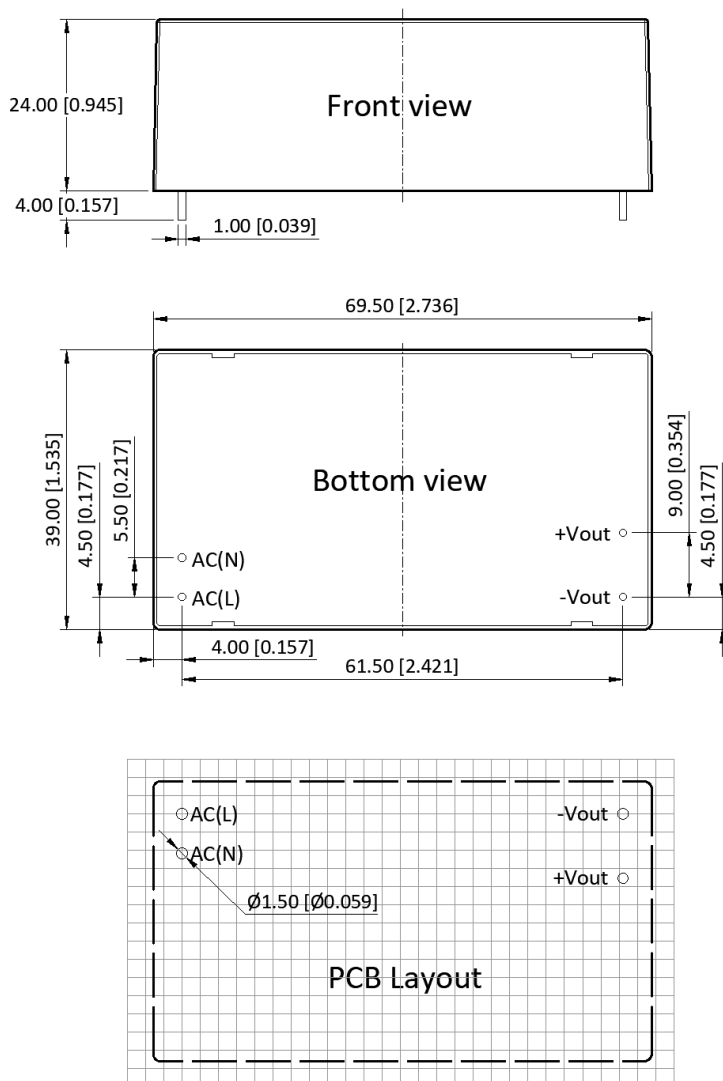

Pin Definition

Pin #	Single Out
1	AC [L]
2	AC [N]
3	+V _{OUT}
4	-V _{OUT}

* Unless otherwise specified unit: mm [inch]

* General tolerance: ± 1.00 [± 0.040]

* Pin thickness: ± 0.15 [± 0.006]

* Pin distance: ± 0.50 [± 0.020]

* Footprint grid 2.54 x 2.54 mm